

Hygrometers

Thermohygrometers

Digital Memory Thermohygrometer

Ranges -10 to +60°C (-14 to 140°F) and 10% to 99% RH resolution 0.1°C/°F, 1% RH. With built-in sensors and dual 12mm high LCD readout. The upper display shows temperature and the lower display relative humidity. A max./min. memory function is provided which allows the maximum and minimum recorded values for both parameters to be recalled and displayed, the user then has the option to reset. Overall 70 x 20 x 110mm W x D x H. Weight 113g. Wall or bench mounting. Supplied with 1 x 1.5V AAA battery.

HY390-20 Digital memory thermohygrometer
BL610-08 Battery, 1.5V AAA

Digital Thermohygrometer, certified

Ranges: temperature -10 to +50°C (internal), -50 to +70°C (external probe) x 0.1°C, humidity 20 to 99% R.H. (internal) x 1% R.H., . With twin line display of unit temperature, unit humidity or probe temperature and clock. The attached probe with 2m cable allows remote monitoring of a refrigerator, freezer or outdoor temperature with Max./Min. function. Supplied with wall hanger, folding table stand, 1.5V AA battery and manufacturer's certificate of calibration (two point - thermometer only) traceable to national and international standards, including NPL and NIST. Overall H x W x D (unit) 103 x 98 x 21mm, weight 121g.

HY407-15 Certified thermohygrometer
BL610-08 Battery, 1.5V AAA

Thermohygrometer, Testo 610

Rugged, pocket-sized meter with integral combined R.H./Temperature sensor. LCD readout displays % R.H. or wet bulb or dewpoint and temperature (°C/°F switchable). With "Hold" and "max./min." functions. Stainless metal display and keypad surround includes on/off, mode and 'hold' buttons.

As described. Supplied with calibration protocol, wrist strap, belt clip holder,

Model	Testo 610	
Range (resolution)	%RH	0 to +100 (0.1)
	°C	-10 to +50 (0.1)
Accuracy	%RH	±2.5 (5 to +95)
	°C	±0.5
Overall L x W x D	mm	119 x 46 x 25
Weight	g	90
Power	2 x 1.5V AAA batteries	

metal protection shroud for the display and keyboard and 2 x 1.5V AAA batteries.

HY440-10 Testo 610
BL610-08 Battery, 1.5V AAA (2 required)

Thermohygrometer, Testo 625

Compact instrument with built-in probe, providing precise measurement and simultaneous display of air, humidity and temperature.

- ◆ Displays temperature and R.H. or wet bulb temperature and dew point
- ◆ Max./Min. values registered
- ◆ Illuminated display


Model	Testo 625	
Ranges	%RH	0 to +100
	°C	-10 to +60
Accuracy (at 25°C, ± 1 sig. digit)	%RH	±2.5 (+5 to +95)
	°C	±0.5
Overall L x W x D	mm	182 x 64 x 40
Weight	g	195
Power	9V PP3 battery	

As described. Supplied with probe, 9V battery and operation manual.


HY470-30 Testo 625

Spares and accessories

- HY472-08** TopSafe protection boot, protects against impacts and dirt
BL610-25 Spare battery, 9V

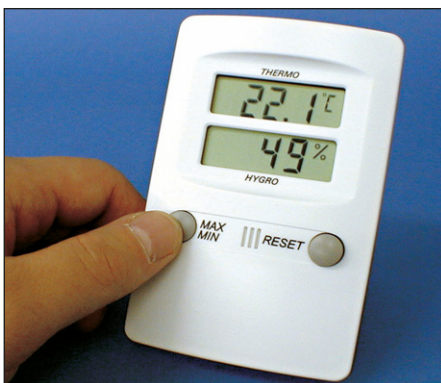

HY390

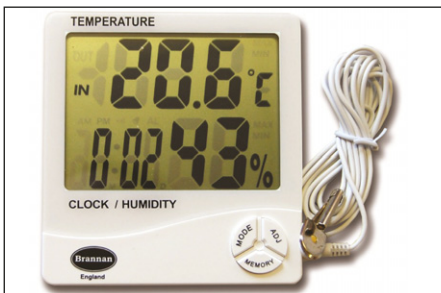

HY407



HY440-10



HY470