

## Cone/Screwthread Adapters

Straight. Suitable for locating plain stem thermometers.

	Thread size	Cone size	Acceptable dia. through screwcap, mm
<b>QST51/13</b>	13	14/23	6.0 to 7.0
<b>QST52/13</b>	13	19/26	6.0 to 7.0
<b>QST53/13</b>	13	24/29	6.0 to 7.0
<b>QST51/18</b>	18	14/23	7.0 to 8.5
<b>QST52/18</b>	18	19/26	7.0 to 8.5
<b>QST53/18</b>	18	24/29	7.0 to 8.5
<b>QST54/18</b>	18	29/32	7.0 to 8.5
<b>QST52/24</b>	24	19/26	10.5 to 11.5
<b>QST53/24</b>	24	24/29	10.5 to 11.5
<b>QST54/24</b>	24	29/32	10.5 to 11.5

This range may also be used as simple stirrer guides provided the silicone ring seal within the screwcap is lubricated.

## Stopcock Adapters

### Cone/flexible tubing

GP Rotaflo key, bore 3mm. Supplied complete with screwthread connector which has a 9mm o.d. nozzle for tubing attachment.

	Cone size
<b>Screwthread connector</b>	
<b>QMF11/1/ISC</b>	14/23
<b>QMF11/2/ISC</b>	19/26
<b>QMF11/3/ISC</b>	24/29
<b>QMF11/4/ISC</b>	29/32
<b>Right angle screwthread connector</b>	
<b>QMF11/1B/ISC</b>	14/23
<b>QMF11/2B/ISC</b>	19/26
<b>QMF11/3B/ISC</b>	24/29

**AD255-10** Spare screwthread tubing connector, polypropylene, 4510/02


**AD256-06** Spare silicone sleeve, 4511/02

### Socket/flexible tubing

GP Rotaflo key, bore 3mm. Supplied complete with screwthread connector which has a 9mm o.d. nozzle for tubing attachment.

	Socket size
<b>Straight screwthread connector</b>	
<b>QMF14/1/ISC</b>	14/23
<b>QMF14/2/ISC</b>	19/26

Spare keys and safety locks – see QGP series.

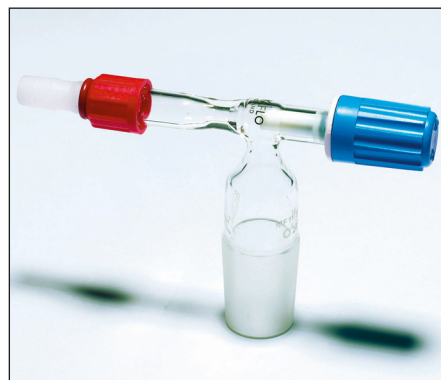


QMF11: BISC



QST51, QST52, QST53



QMF11: ISC

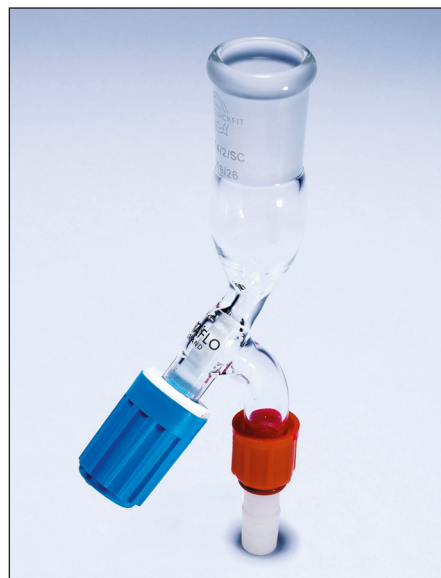

QMF14: ISC