

## Cone Joints


	Cone size	Min. shank length mm	Max. shank o.d. mm	Min. bore mm	Min. wall thickness mm
<b>Plain end, single, Quickfit badged</b>					
<b>QCNB50</b>	50/42	100	49.0	39.0	2.0
<b>Plain end, single, unbadged</b>					
<b>QCNB7UB</b>	7/16	100	7.0	2.5	1.0
<b>QCNB10UB</b>	10/19	100	9.0	5.0	1.0
<b>QCNB12UB</b>	12/21	100	12.0	6.5	1.25
<b>QCNB14UB</b>	14/23	100	14.0	8.5	1.25
<b>QCNB19UB</b>	19/26	100	18.0	12.0	1.5
<b>QCNB24UB</b>	24/29	100	23.0	16.5	1.75
<b>QCNB29UB</b>	29/32	100	28.0	21.0	1.75
<b>QCNB34UB</b>	34/35	100	33.5	26.0	1.75
<b>QCNB40UB</b>	40/38	100	39.0	29.5	2.5
<b>QCNB45UB</b>	45/40	100	43.0	35.0	2.0

	Cone size	Min. shank length mm	Max. shank o.d. mm	Min. bore mm	Min. wall thickness mm
<b>With long tip, double</b>					
<b>QCBD12/60</b>	19/26	60	18.0	8.0	1.5
<b>QCBD3/95</b>	24/29	95	23.0	14.0	1.75
<b>QCBD4/125</b>	29/32	125	28.0	19.0	1.75
<b>With stem, reduced shank, single</b>					
Stem length 150mm.					
<b>QMF15/1</b>	14/23	45	7.4	4.4	0.9
<b>QMF15/2</b>	19/26	60	10.4	6.2	1.3
<b>QMF15/3</b>	24/29	70	9.6	6.2	1.3


### PTFE Sleeves, Azlon

For fitting over ground glass cones to provide greaseless lubrication. Wall thickness 0.07mm, taper 1:10. Supplied in packs of 10.

	Ref.	For cone
<b>QZZ20/14</b>	SWN961	14/23
<b>QZZ20/19</b>	SWN962	19/26
<b>QZZ20/24</b>	SWN963	24/29
<b>QZZ20/29</b>	SWN964	29/32
<b>QZZ20/34</b>	SWN965	34/35
<b>QZZ20/40</b>	SWN966	40/38
<b>QZZ20/55</b>	SWN969	55/44

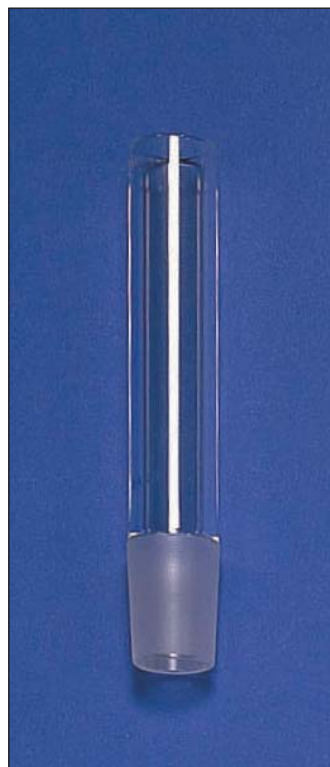

QCNB

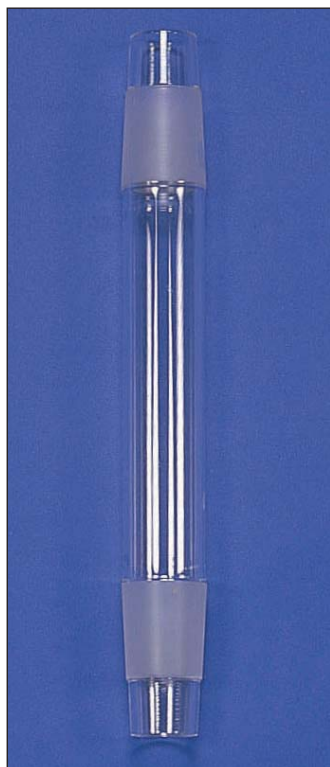

QCBD



QMF15



QZZ20