

Cone Joints


	Cone size	Min. shank length mm	Max. shank o.d. mm	Min. bore mm	Min. wall thickness mm
Plain end, single, Quickfit badged					
QCNB50	50/42	100	49.0	39.0	2.0
Plain end, single, unbadged					
QCNB7UB	7/16	100	7.0	2.5	1.0
QCNB10UB	10/19	100	9.0	5.0	1.0
QCNB12UB	12/21	100	12.0	6.5	1.25
QCNB14UB	14/23	100	14.0	8.5	1.25
QCNB19UB	19/26	100	18.0	12.0	1.5
QCNB24UB	24/29	100	23.0	16.5	1.75
QCNB29UB	29/32	100	28.0	21.0	1.75
QCNB34UB	34/35	100	33.5	26.0	1.75
QCNB40UB	40/38	100	39.0	29.5	2.5
QCNB45UB	45/40	100	43.0	35.0	2.0

	Cone size	Min. shank length mm	Max. shank o.d. mm	Min. bore mm	Min. wall thickness mm
With long tip, double					
QCBD12/60	19/26	60	18.0	8.0	1.5
QCBD3/95	24/29	95	23.0	14.0	1.75
QCBD4/125	29/32	125	28.0	19.0	1.75
With stem, reduced shank, single					
Stem length 150mm.					
QMF15/1	14/23	45	7.4	4.4	0.9
QMF15/2	19/26	60	10.4	6.2	1.3
QMF15/3	24/29	70	9.6	6.2	1.3


PTFE Sleeves, Azlon

For fitting over ground glass cones to provide greaseless lubrication. Wall thickness 0.07mm, taper 1:10. Supplied in packs of 10.

	Ref.	For cone
QZZ20/14	SWN961	14/23
QZZ20/19	SWN962	19/26
QZZ20/24	SWN963	24/29
QZZ20/29	SWN964	29/32
QZZ20/34	SWN965	34/35
QZZ20/40	SWN966	40/38
QZZ20/55	SWN969	55/44

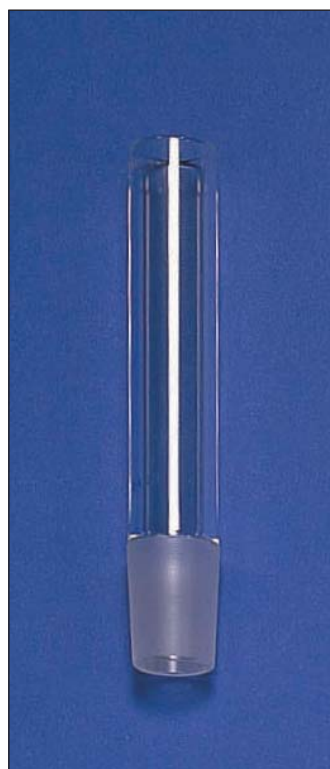

QCNB

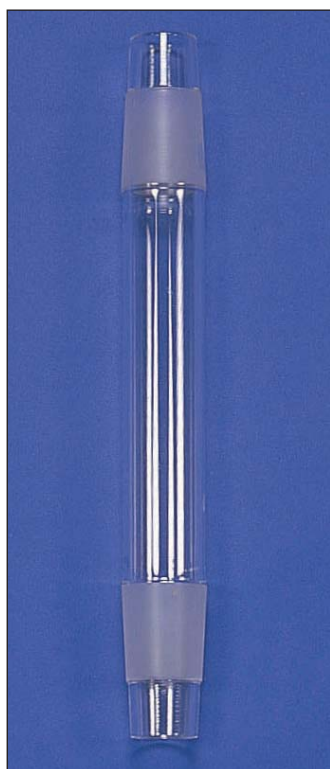

QCBD



QMF15



QZZ20