

Safety

Bench Protection

Benchkote, Whatman

Used for protecting laboratory benches and drawers. The smooth, highly absorbent paper top surface is laminated to a strong layer of impermeable polyethylene. A contaminated sheet can be discarded easily and incinerated if necessary.

- SA200-20** Pack of 50 sheets, 46 x 57cm
- SA200-30** Pad of 50 sheets, 46 x 57cm
- SA204-15** Reel 50 metres x 46cm wide
- SA204-25** Reel 50 metres x 92cm wide

Benchkote Plus, Whatman

Similar to the standard Benchkote SA200/204 series but with a greater thickness and more open structure to provide greater absorbency. With impermeable polyethylene backing.

- SA205-12** Pack of 50 sheets, 50 x 60cm
- SA205-18** Reel 50 metres x 60cm wide

BenchGuard

For protecting work surfaces. A highly absorbent white paper with a polycoated underside to prevent seepage through to the bench. Suitable for the majority of applications.

- SA215-12** Wallet of 100 sheets, 60 x 49cm
- SA215-15** Dispenser pack of 50 metres x 49cm wide

BenchGuard Extra

Has extra absorbency to soak up heavy spillages.

- SA215-50** Wallet of 50 sheets, 60 x 49cm
- SA215-55** Dispenser pack of 50 metres x 49cm wide

Mats, Ceran®

Ceran® is a highly resistant glass ceramic material with a smooth, pore-free surface making it ideal for bench protection purposes where chemically aggressive materials may be spilled or hot vessels may be placed. Operating temperature range -200 to +700°C allows the mat to be used as a heating surface in place of a wire gauze or fireclay triangle. Care should be taken to ensure that the maximum operating temperature is not exceeded when using with a Bunsen burner. Supplied in packs of 10.


- MB820-10** 135 x 135mm
- MB820-20** 155 x 155mm
- MB820-30** 175 x 175mm

Ceran® is a registered trade mark of Schott Glaswerk.


Ceramic Fibre and PTFE Mats for bench protection – see *Mats* section.



SA200 in use

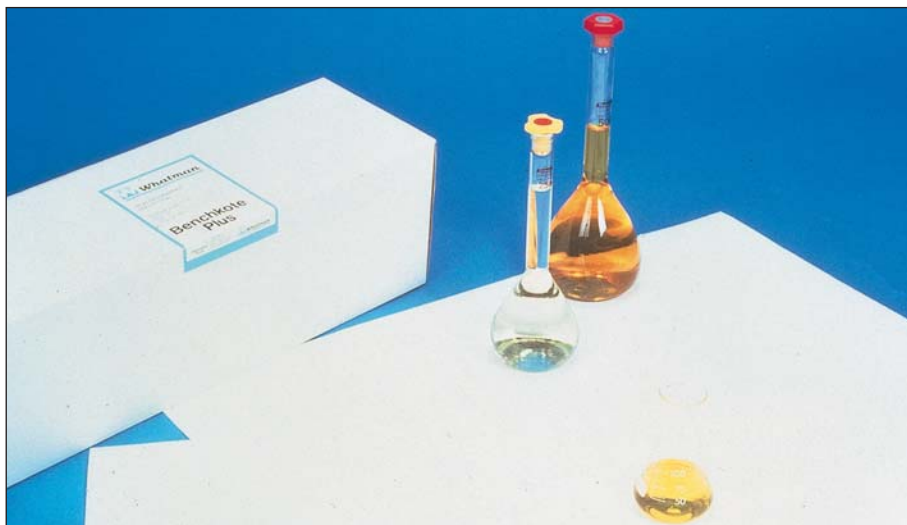

SA205 in use

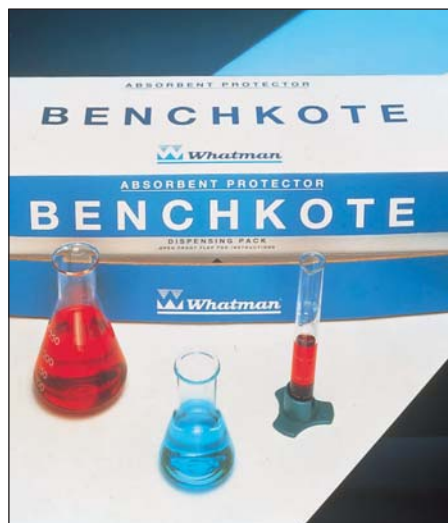

SA204 in use



SA215



MB820 in use