

Safety

Ear Protection

Ear Plugs, disposable

Soft, slow expanding, polyurethane foam plugs which are pliable and tapered for easy insertion. Meet the requirements of EN352-2. The foam gives an evenly distributed pressure, optimising comfort and sealing. Plugs are brightly coloured (neon yellow) and long (25mm) aiding removal. The Simplified Noise-level Reduction (SNR) achieved is in the order of 36db. Supplied in pack of 250 pairs.

SA858-20 Ear plugs

Ear plugs, disposable, Kleenguard™ H10

To EN352-2 (2002). Provide simplified noise-reduction (SNR) of 31db. Soft, roll down foam plugs for easy insertion and giving an evenly distributed pressure. Supplied in packs of 200 pairs.

SA858-25 H10, uncorded

Ear plugs, re-useable, Kleenguard™ H20

Styled for easy holding and insertion. To EN352-2 (2002). Provide simplified noise-reduction (SNR) of 25db. Available corded together or uncorded. Supplied in packs of 100 pairs.

SA858-31 H20, uncorded

SA858-33 H20, corded

Ear clips, re-useable, Kleenguard™ H50

To EN352-2 (2002). Provide simplified noise-reduction (SNR) of 23db. Innovative design, secure, unobtrusive ear clip frame with soft foam plugs which conform to the ear canal without rolling. Available corded together or uncorded. Supplied in packs of 10 pairs.

SA858-42 H50, uncorded

SA858-45 H50, corded

Hearing Protector

A lightweight protector suitable for short term use. Tested to BS5108 and conforming to the quality requirements of BS6344. With adjustable headband and soft ear cushions. Can be folded for easy storage when not in use. Weight 180g.

SA860-10 Folding protector

Sound Level Meter

Portable instrument suitable for measuring industrial and civil noise levels. According to IEC61672-1 with class 2 accuracy.

- ◆ Range: +30 to +130dB x 0.1dB resolution
- ◆ Precision: ±1.4dB (±1 digit)
- ◆ Max/Min. memory function
- ◆ Frequency weighing according to A characteristics curves

As described. With backlit LCD display, robust ABS housing with screw mounting for fitting to an accessory camera tripod, microphone with wind shield, 9V PP3 battery and instruction manual.

SA885-10 Sound level meter, compact

BL610-25 Spare battery, 9V



SA858-20



SA858-42




SA858-25



SA860



SA858-33

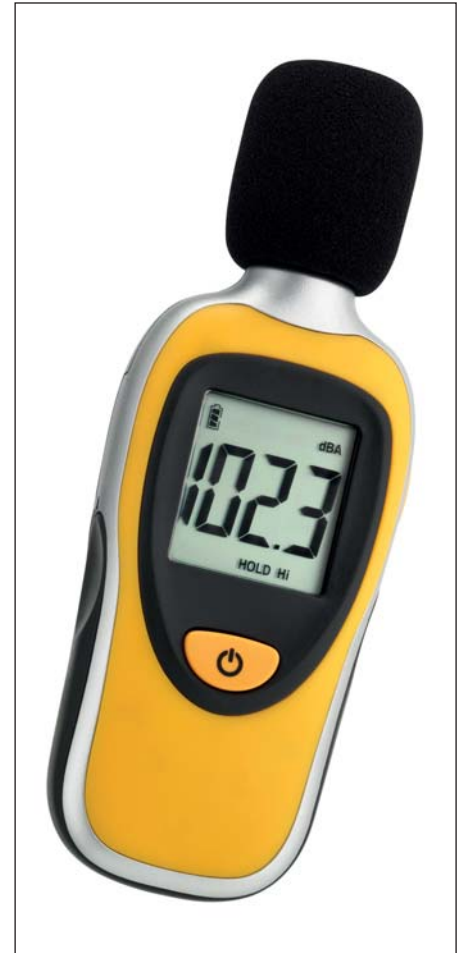

SA885-10