

Stands and Racks, Steamer

Tripods

Tripod Stands

Height 200mm.

	Length of side, mm
--	--------------------

Iron rod, triangular top

SM900-12 125

Cast iron, triangular top

SM904-12 125

SM904-15 150

SM904-20 200

Cast iron, circular top

SM914-15 150

Gauzes, iron wire

	Size cm
--	---------

Open mesh

GK600-12 12.5 x 12.5

GK600-15 15 x 15

Ceramic centre

GK605-10 10 x 10

GK605-12 12.5 x 12.5

GK605-15 15 x 15

Mats

Mats, ceramic fibre

Provide heat protection to benches. An alternative to asbestos bench mats. Approximately 5mm thick. Maximum operating temperature 80°C. Supplied singly.

	Size, mm
MB800-15	150 x 150
MB800-22	225 x 225
MB800-30	300 x 300

Mats, Ceran®

Ceran® is a highly resistant, glass ceramic material. Operating temperature range -200 to +700°C, allowing the mat to be used as a heating surface in place of a wire gauze or fireclay triangle. Care should be taken to ensure that the maximum operating temperature is not exceeded when using with a Bunsen burner. Supplied in packs of 10.

	Size, mm
MB820-10	135 x 135
MB820-20	155 x 155
MB820-30	175 x 175

Ceran® is a registered trade mark of Schott Glaswerk.

Bench Protection Sheets – see *Safety section*.

Steamer

A stainless steel insulated boiler with removable lid and 1.5kW immersion heater with cut-out facility which operates if the tank boils dry. With two removable shelves, lifting handles, water filling trough and 25mm tube in the lid for mounting a thermometer. Internal 300 x 302 x 500mm deep and overall 329 x 329 x 690mm W x D x H. For 230V 50/60Hz a.c. single phase supplies.

SP715-10 Koch Steamer

Autoclaves – see *AU112/AU180*.

Boiling water baths – see *BH105/BH120*.




SM900



SM904

SM914

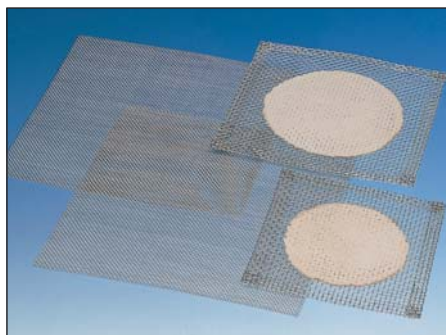

GK600

GK605



MB800



MB820 in use



SP715