

Stopcocks

Pyrex® PTFE Key

With PTFE keys in polished glass barrels having a taper of 1:10 (DIN 12541 standard). Side arms are 100mm long unless otherwise stated.

With two types of retaining device.

Bore sizes 1 to 4mm – Nylon nut, PTFE washer and nitrile rubber O-ring.

Bore size 6mm – Nylon nut, nylon washer and tension spring.

Straight bore stopcocks up to 12mm o.d. side arms have 1.0mm wall thickness all others have 1.5mm wall thickness.

Ref.	Key bore mm	Side arm o.d. mm	Spare key	
Straight stopcocks, plain arms, single bore				
SV330-10	SST102	1.5	8	SV350-10
SV330-15	SST103	2.5	10	SV350-15
SV330-20	SST104	4	10	SV350-20
SV330-30	SST106	6	12	SV350-30
Straight stopcocks, plain arms, double oblique bore				
SV335-15	SST203	2.5	9	—
T-bore stopcocks, plain arms, 3-way				
SV340-20	SST304	4	10	SV358-20

Spare PTFE Keys

For Pyrex DIN stopcocks.


	Ref.	Bore, mm	Type
SV350-10	SST102K	1.5	Straight bore
SV350-15	SST103K	2.5	
SV350-20	SST104K	4	
SV358-20	SST304K	4	

Note:

Components from Pyrex® DIN 12541 PTFE key stopcocks are incompatible with the previous Interflon range. Please contact us for advice.




SV330

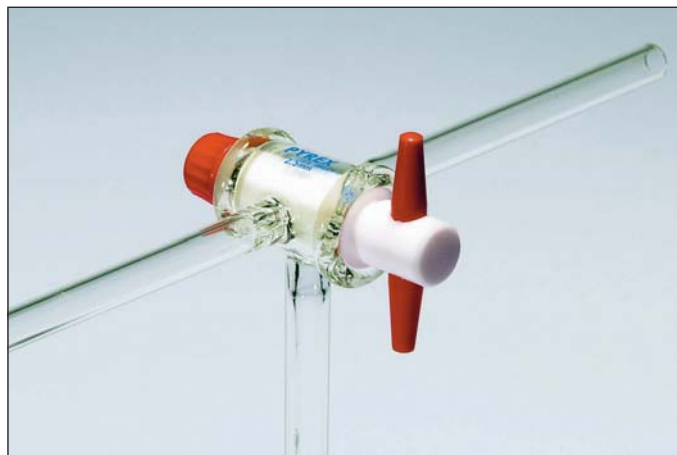

SV340



SV335

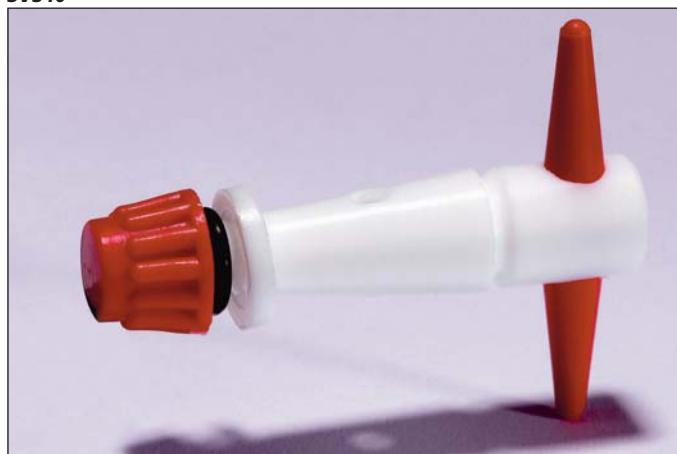

SV350 to SV358